



## Gerband 350 sk Diffusion Closed sealing Film

### Application:-

Diffusion Closed sealing film, can be plastered in air and wind-tight sealing connection joints of windows and doors

Gerband 350 SK is on one side equipped with a very strong self-adhesive strip for easy Mounting on the window and door frames

Gerband 350 SK is used for warm-side sealing to the building design aspect, i.e. inside.

To bond and airtight seal Gerband 350 SK to plaster walls, etc. use the suitable high-performance Adhesive Sealant Gerband Fortax 6600

### Technical Data:-

**Carrier Support:-** 3 layer film / nonwoven composite, flexible, tear resistant, strong vapor barrier, waterproof, Can be plastered over.

**Thickness:-**  $0.3 \pm 0.1$  mm **Weight:-**  $140 \pm 15$  g / m<sup>2</sup> **Adhesive type:-** Polyacrylate

**SD value (Din EN ISO 12572):-** ca. 50 m

**Tensile strength Longitudinal (Din 53571):-** 13.4 N / mm<sup>2</sup>

**Tensile strength transversely (Din 53571):-** 7.1 N / mm<sup>2</sup>

**Elongation at break longitudinal (Din 53571):-** 57% N / mm<sup>2</sup>

**Elongation at break, Transversely (Din 53571):-** 50% N / mm<sup>2</sup>

**Water resistant:-** Yes

**Plastered over:-** Yes

**Roll/Band width:-** 75mm to 300mm **Roll length:-** 30 meters

**Inner core diameter:-** 76,5 mm

**Color:-** Red

**Media resistance:-** Water, salt solutions, acids, Bases, due to organic solvent and Hydrocarbons dry at 5 to 25 ° C, UV-protected

**Storage:-** Dry storage at 5 to 25 ° C, UV-protected

More technical information on Gerband 350 sk available on request

### Gerband 350 sk Diffusion-Closed Sealing Film

**Backing** Triple-layered film / non-woven lamination  
**Color** red  
**Sd value** approx. 50 m  
**Watertightness** specified  
**Plasterable** specified


Diffusion-open sealing film that may be plastered over for the wind and airtight sealing of joints to windows and doors. Gerband 350 sk is flexible, tear and rip resistant, as well as strongly vapor tight. Gerband 350 sk is equipped on one side with a very strong self-adhesive tape for easy fixing onto the window.

Gerband 350 sk is used at the structural warm side, i.e. the interior wall.

widths mm	75	100	150	200	250	300
rolls per carton	8	6	4	2	2	2

For bonding to Gerband 350 sk we recommend our high-performance adhesive Gerband Fortax 6600.

Sealing of window joint with sealing membrane Gerband 301 sk that may be plastered over for cold-side sealing and Gerband 350 sk for warm-side sealing; easy installation onto the window frame through integrated self-adhesive tapes.

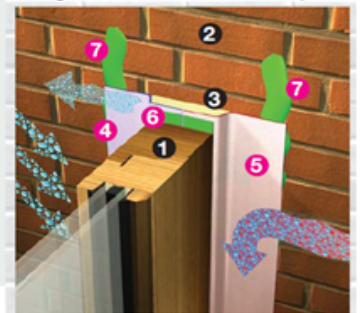

1. Window frame
2. Embrasure
3. PUR Foam
4. Gerband 301 sk, diffusion-open
5. Gerband 350 sk, diffusion-tight
6. "sk" self-adhesive
7. High performance adhesive Fortax 6600